

Product Sheet

Deviation possible! All information is subject to change.

Item No. **T I P 2 6 S C 100 R 4 E 2 Q 0 N**


housing / data

| | |
|-----------------------------|--------------------------------|
| housing type | swivel castor with total brake |
| fixing type | fixing plate |
| hole dimensions / hub width | 80 x 60 mm / 42 mm |
| thickness of fixing / fork | 2.50 mm / 2.00 mm |
| surface treatment | stainless steel |



wheel / data

| | |
|--------------------|----------------------------------|
| diameter | 100 mm |
| wheel center | Polyamide black |
| wheel tread | elastic 65° Shore A grey |
| bearing | roller bearing (stainless steel) |
| threadguard | no separate threadguard |
| hub width | 40 mm |
| axle diameter | M 8 |
| temperature range | -20°C - +80°C |
| dyn. load capacity | 150 kg |

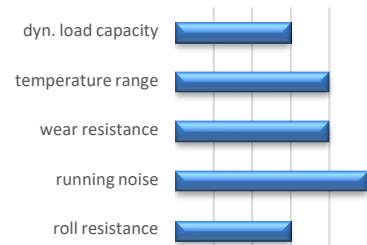

0 1 2 3 4 5

